


SPECIFICATION

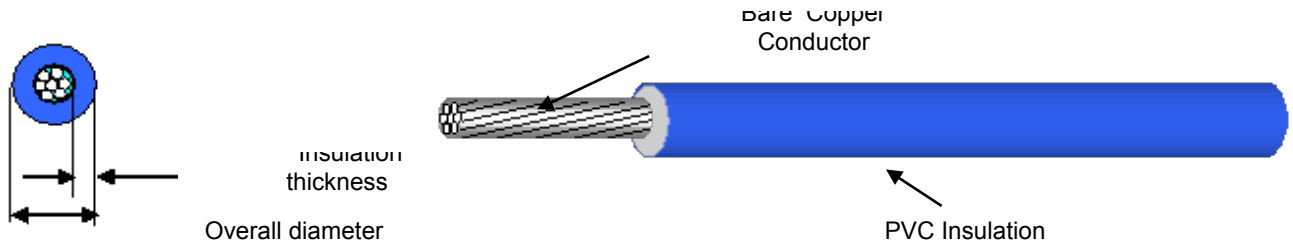

QVR Low-voltage Wires for Automobiles

PRODUCT DESCRIPTION

- Rated Temperature: 70°C
- Rated Voltage: 25 VAC and 60 VDC
- Reference Standard: JB/T 8139-1999
- Stranded Bare Copper Conductor
- PVC Insulation
- Flame resistance: JB/T8139-1999
- No Marking

Application

For internal wiring of vehicles metres circuits and electronic equipments where exposed to temperatures not exceeding 70°C

STYLE	Conductor			Insulation		Finish OD	Maximun Resistance at 20°C Ω/Km	Withstand voltage KV	Packing
	mmsq	No./mm	Out.Dia. mm	Std.Thick mm	Min.Thick mm	Max mm			
QVR	0.2	12/0.15	0.6	0.3	0.17	1.3	92.3	1KV 30MIN	Optional
	0.3	16/0.15	0.7	0.3	0.17	1.4	69.2		Optional
	0.4	23/0.15	0.8	0.3	0.17	1.4	48.2		Optional
	0.5	16/0.20	0.9	0.6	0.44	2.4	39		Optional
	0.75	24/0.20	1.2	0.6	0.44	2.6	26		Optional
	1	32/0.20	1.35	0.6	0.44	2.8	19.5		Optional
	1.5	30/0.25	1.7	0.6	0.44	3.1	13.3		Optional
	2.5	50/0.25	2.2	0.7	0.53	3.7	7.98		Optional
	4	56/0.30	2.8	0.8	0.62	4.5	4.95		Optional
	6	84/0.30	3.30	0.8	0.62	5.1	3.3		Optional
	10	84/0.40	4.50	1.0	0.8	6.7	1.91		Optional
	16	126/0.40	6.3	1.0	0.8	8.5	1.21		Optional
	25	196/0.40	7.6	1.3	1.07	10.6	0.78		Optional
	35	276/0.40	9.2	1.3	1.07	11.8	0.554		Optional
	50	396/0.40	11.0	1.5	1.25	13.7	0.386		Optional
70	560/0.40	13.1	1.5	1.25	15.7	0.272	Optional		

Color Code: BK-Black WT-White YL-Yellow BR-Brown GN-Green RD-Red OG-Orange GY-Grey BL-Blue VT-Violet GNYL-Gn/YL

Specification available: Reference to specification table, special Specification also can be ordered.

Conductor tolerance: +/-0.008mm.