


## SPECIFICATION

2012091504A0

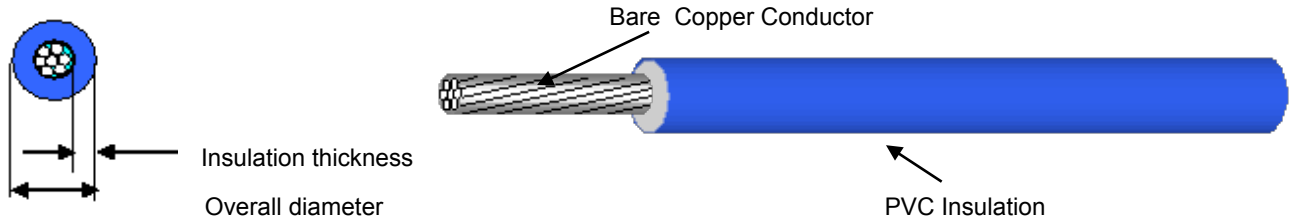

### AVSS Extremely Thin Wall Low-Voltage Wire for Automobiles

#### JASO D 611 Series

- Rated Temperature: 80°C
- Rated Voltage: 25 VAC and 60 VDC
- Reference Standard: JASO D 611、ISO6722
- Stranded Bare Copper Conductor
- PVC Insulation
- No Marking

#### Application

For internal wiring of vehicles metres circuits and electronic equipments where exposed to temperatures not exceeding 80°C

No.	Conductor			Insulation		Over Diameter		Maximum Resistance at 20°C Ω /Km	Packing
	mmsq	No./mm	Out.Dia. mm	Std.Thick mm	Min.Thick mm	Standard mm	Max mm		
AVSS	0.22	7/0.2	0.6	0.3	0.24	1.2	1.3	84.8	500-1000
AVSS	0.3	7/0.26	0.8	0.3	0.24	1.4	1.5	50.2	500-1000
AVSS	0.3f	19/0.16	0.8	0.3	0.24	1.4	1.5	48.8	500-1000
AVSS	0.5	7/0.32	1.0	0.3	0.24	1.6	1.7	32.7	500-1000
AVSS	0.5f	19/0.19	1.0	0.3	0.24	1.6	1.7	34.6	500-1000
AVSS	0.75f	19/0.23	1.2	0.3	0.24	1.8	1.9	23.6	500-1000
AVSS	0.85	19/0.24	1.2	0.3	0.24	1.8	1.9	21.7	500-1000
AVSS	1.25f	37/0.21	1.5	0.3	0.24	2.1	2.2	14.6	500-1000
AVSS	1.25	19/0.29	1.5	0.3	0.24	2.1	2.2	14.9	500-1000
AVSS	2.0	19/0.37	1.9	0.4	0.32	2.7	2.8	9	500-1000
AVSS	2f	37/0.26	1.8	0.4	0.32	2.6	2.7	9.5	500-1000

Color Code: BK-Black WT-White YL-Yellow BR-Brown GN-Green RD-Red OG-Orange GY-Grey BL-Blue VT-Violet GNYL-Gn/YL

Specification available: Reference to specification table, special Specification also can be ordered.

Conductor tolerance: +/-0.008mm.