



PHINE GROUP CO., LIMITED

SPECIFICATION

UL2464 CABLE 6C AWG24 BLACK

CABLE DATA

● Conductor:Tinned Plated Copper	● Rated Voltage: 300V DC
● Operating Temperature: 80°C	● RoHs Compliant
● Flame resistance: VW-1 or FT1	● Standard: UL Subject 758

Cores:

● Conductor Size: AWG18 TC11/0.11±0.008MM(Tinned Copper)	● Insulation Material : PVC
● Insulation Thickness: 0.38MM	● Insulation OD: 1.40 ± 0.1MM
● Color: BROWN, BLUE, BLACK, YELLOW, RED, WHITE	● 6 cores twisted
● No marking	


Jacket:

● Material: PVC 80°C	● Color: BLACK
● Wall Thickness (NOM): 0.76MM	● Finish OD: 5.80 ± 0.2MM

Marking:

E332295 ㉔ AWM STYLE 2464 24AWG 80°C 300V VW-1 PVC HUIZHOU BINDA ㉔ AWM I A 80°C 300V FT1 -LF-

Construction:

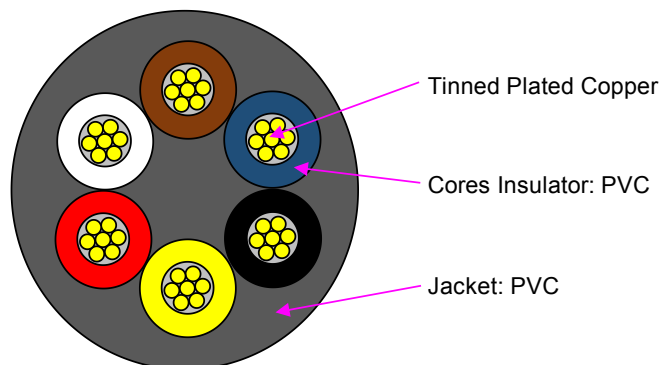

Issue by : *Joe. Ch*

Confirm By: