



菲銀集團有限公司

PHINE GROUP CO., LIMITED

SPECIFICATION

UL2651 AWG26 TS7/0.16 PVC INSULATED 105C 300V HOOK UP WIRE

● Conductor: Tinned Plated Copper	● Flame resistance: VW-1 or FT1
● Insulation: PVC	● Standard: UL758, UL1581 C22.2
● Operating Temperature: 105°C	● RoHs Compliant
● Rated Voltage: 300V	
● Application: Internal wiring of appliances and electronic equipment	


CABLE DATA:

CONDUCTOR	SIZE: AWG26		
	TINNED COPPER 7/0.16±0.008MM		
	RESISTANCE AT 20°C MAX. 149Ω/KM		
INSULATION	MATERIAL: PVC INSULATION		
	INSULATION THICKNESS: NOM: 0.26MM, MIN: 0.18MM		
	OVER DIAMETER: 1.0±0.1MM		
	RATED: 105 °C PVC		
	RESISTANCE AT 20°C Min. 0.75MΩ/KM		
	COLOR: GREY		
	CORES: 8P (PH=2.0±0.15MM)		
ELECTRIC FUNCTION	RATED VOLTAGE	300V	
	VOLTAGE-WITHSTAND	2000V/1MINUTE	
	TENSILE STRNGTH	BEFORE AGEING: 1500PSI	AFTER AGEING: 75%
	ELONGATION	BEFORE AGEING: 100%	AFTER AGEING: 65%

MARKING:

AWM 2651 26AWG 105°C 300V VW-1 E332441 YAOBO C AWM I A 105°C 300V FT1
--

UNIT单位: mm

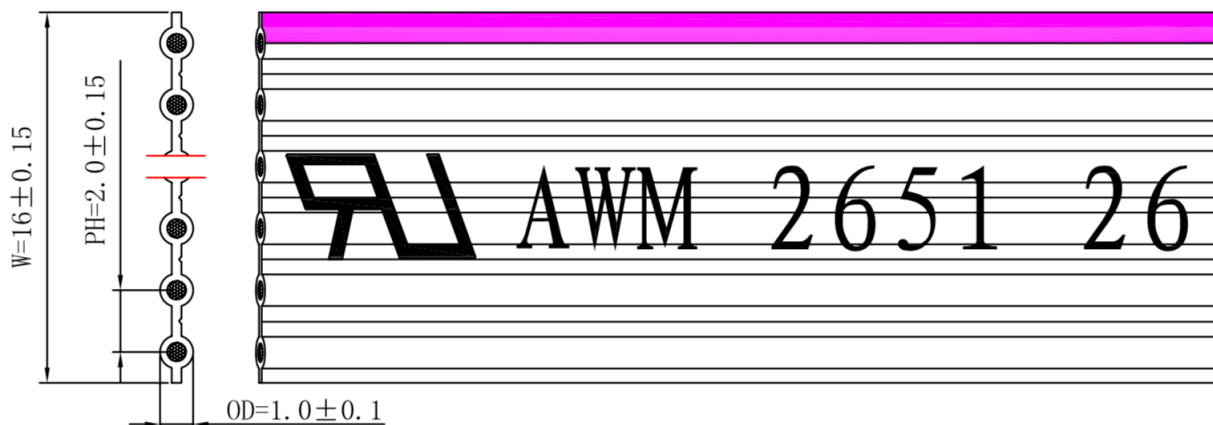

Issue by : Mark

Confirm By:

COPYRIGHT © 2012 PHINE GROUP CO., LIMITED.